

# Percentage Cycle Timer




- New externally mounted push button time selection feature makes it easy to install and program
  - No need to remove cover to set cycle time
  - No more DIP switch to set
  - Easy programming
- Percentage cycle timer that has 8 selectable time durations:
  - 30 seconds,
  - 1, 3, 5, 10, 30 minutes,
  - 1, 4 hours
- Cycling pattern from 3% to 97% of total cycle duration
- 120 or 240 VAC, 50/60 Hz operation allows for single model control in various applications


*Replaces many competitive SKUs*

## Applications

- Poultry Houses
- Fans
- Misters
- Foggers
- Feeders
- Irrigation
- Nurseries



# Percentage Cycle Timer

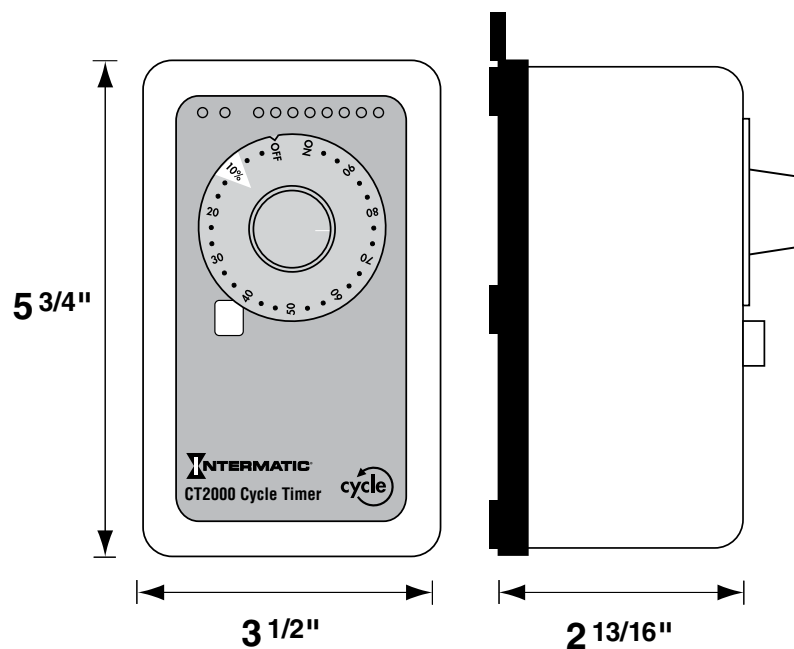


## Benefits

- Sealed enclosure handles dusty, ammonia rich or wash-down environments
- LED indicators provide constant operation feedback
- Manual On or Off override allows users to bypass cycling pattern when required



## Specifications

Voltage/Frequency:	120/240 VAC, 50/60 Hz
Switch:	SPST
Resistive:	20 AMP
Motor:	2 H.P., 240 VAC; 1 H.P., 120 VAC
General Purpose:	20 AMP, 240 VAC
Tungsten (incandescent):	5 AMP, 240 VAC
Pilot Duty:	470 VA, 240 VAC
Ballast (fluorescent):	10 AMP, 277 VAC
Operating Ambient Temperature Range:	-10°C (14°F) to +60°C (140°F)
Surge Protection:	Up to 6000 VAC
Agency Approval:	

Total Cycle Duration	Minimum ON/OFF	Maximum ON/OFF
30 Seconds	1 Second	29 Seconds
1 Minute	2 Seconds	58 Seconds
3 Minutes	6 Seconds	2 Minutes 54 Seconds
5 Minutes	10 Seconds	4 Minutes 50 Seconds
10 Minutes	20 Seconds	9 Minutes 40 Seconds
30 Minutes	1 Minute	29 Minutes
1 Hour	2 Minutes	58 Minutes
4 Hours	8 Minutes	3 Hours 52 Minutes